

VION®

AUTO WINDOW FILMS

Premium Tint

Metalised Polyester




VION PREMIUM TINT AUTOMOTIVE WINDOW FILMS

are 55 micron (2% Limo = 65 micron, 5% = 60 micron), two ply (2% Limo = four ply, 5% = three ply), metalised films with a 15 year durability. These films combine discretion and privacy from prying eyes with technical efficiency in reflecting solar heat.

An installer-friendly design ensures effortless application and uniform results. Enhanced with superior scratch resistance, it stands as the ideal solution for durable, easy installation and enduring window protection.

FEATURES AND ADVANTAGES

- Protects against UVA-B with over 99%
- 2 ply construction (2% Limo = 4 ply, 5% = 3 ply)

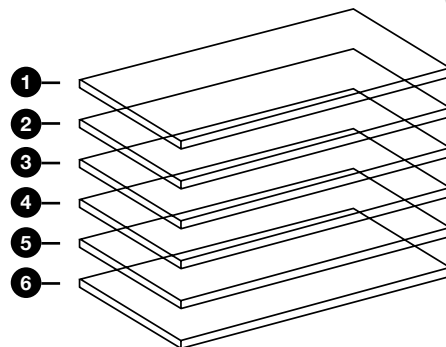

CONSTRUCTION

1. Common scratch-resistant hard layer, allowing good durability and ease of maintenance when cleaning windows.
2. High-quality optical polyester, tinted in mass optical distortion.
3. Bonding Adhesive.
4. High-quality optical polyester, tinted in mass with anti-heat nano-ceramic
5. PS Adhesive, polymerizing with the glass within 15 days.
6. Adhesive protective liner, disposable after installation.

15 YEAR WARRANTY

UV ABSORPTION
99%

THICKNESS
55-65µ

REJECTED INFARED
+85%

CONSTRUCTION
2PLY

Product	Glare Reducation	Total Solar Energy Rejected	Visible Light Transmission
Clear Window	9%	12%	90%
VION Premium Tint 2% Limo	97%	69%	3%
VION Premium Tint 5%	94%	59%	5%
VION Premium Tint 15%	85%	57%	15%
VION Premium Tint 25%	75%	54%	25%
VION Premium Tint 35%	65%	47%	36%
VION Premium Tint 45%	50%	39%	54%
VION Premium Tint 70%	29%	32%	70%

Terms and Conditions: All information published on this product bulletin is based on tests believed to be accurate and reliable. We cannot therefore guarantee it is precise. The seller shall not be liable for injury, loss or damage, direct or consequential, arising out of the inability to use the product.

VISUAL VIBRANT VIVID VION

vionfilms.co.uk